


25
YEARS

DOORS ARE

TOORS

DOUBLELEAF DOOR 2LD

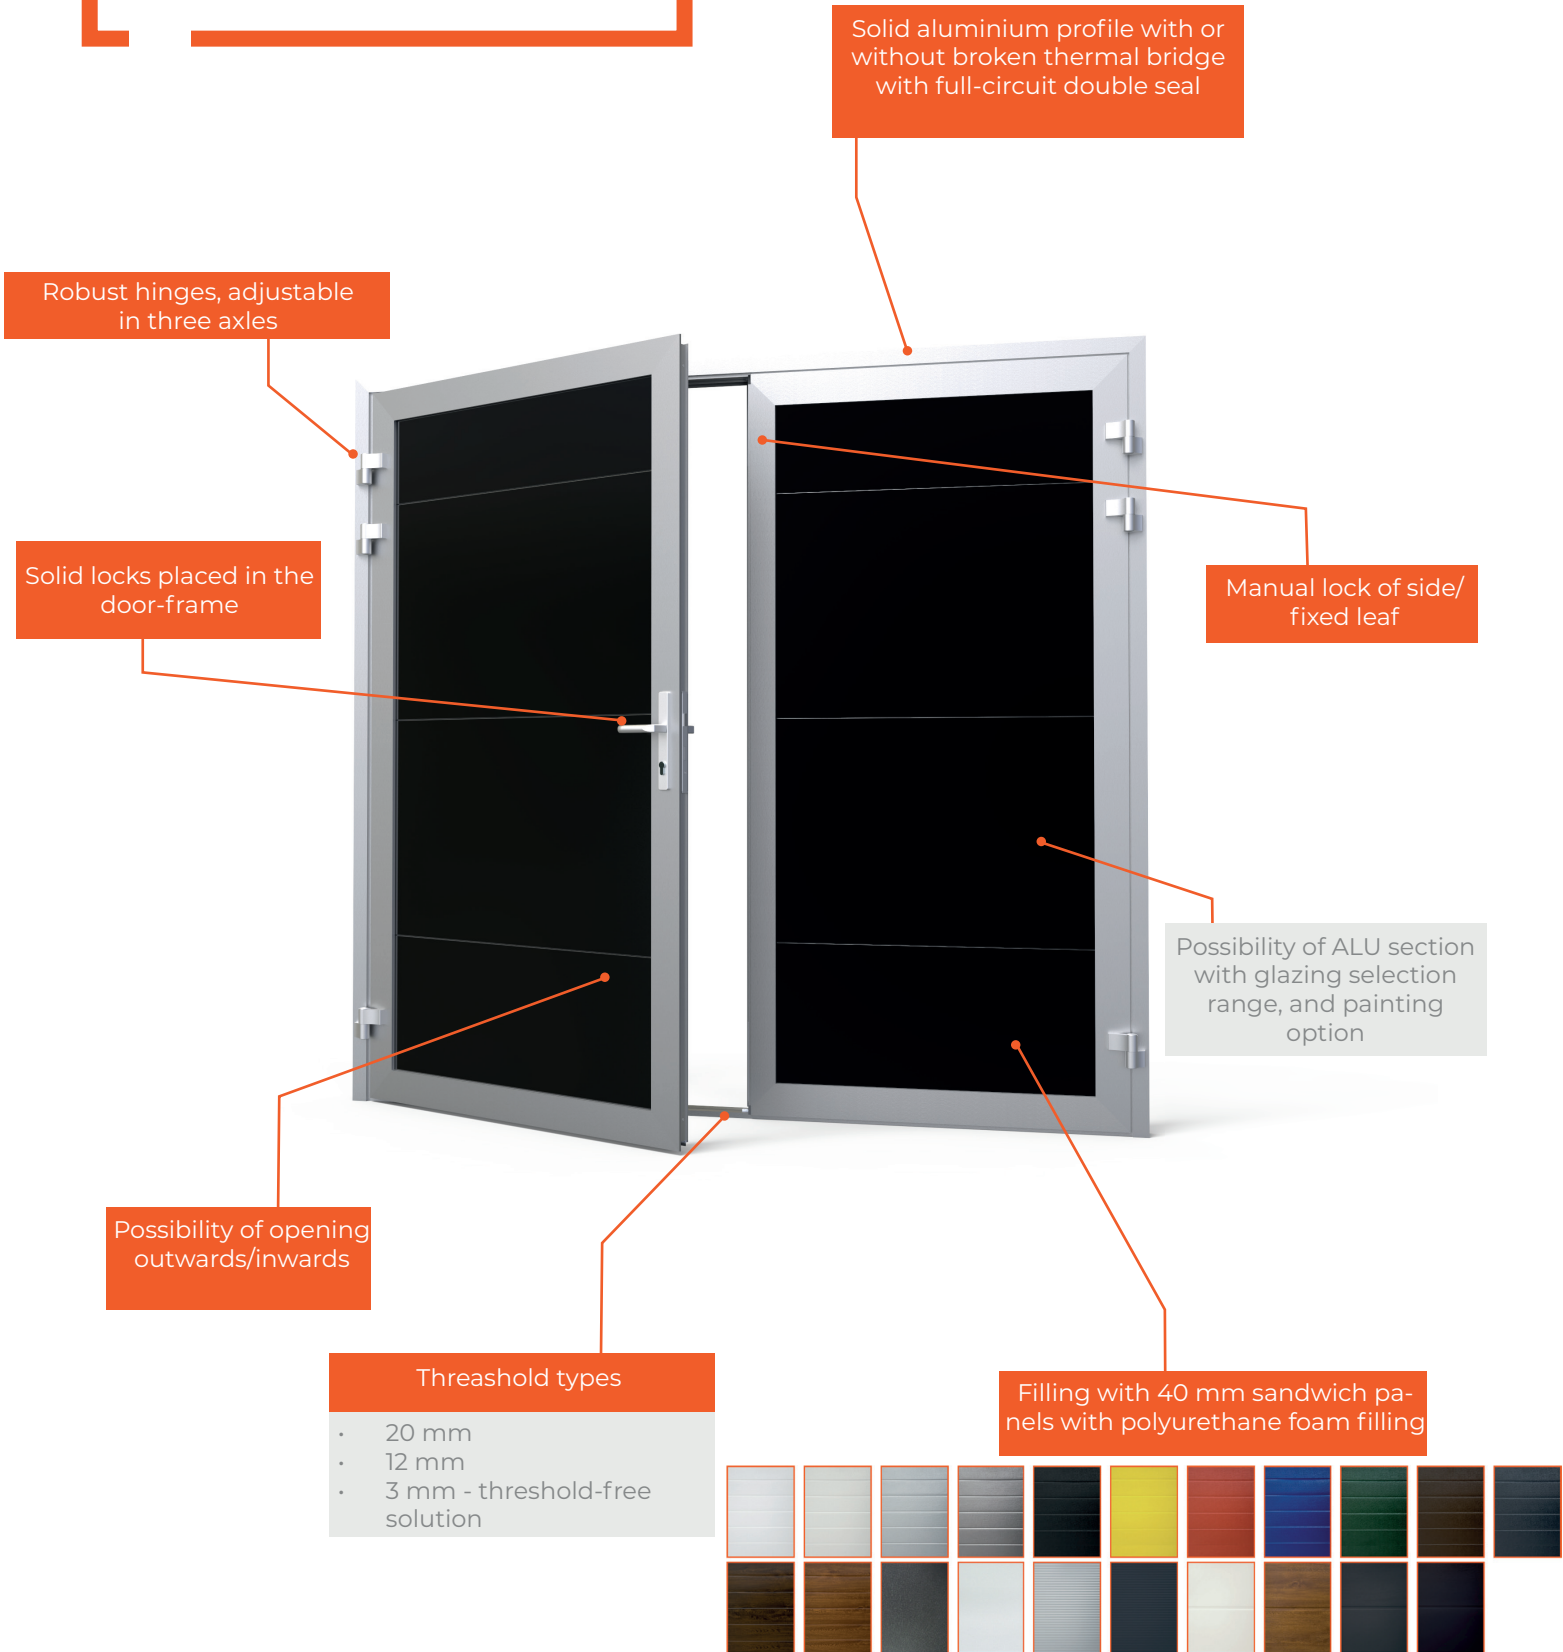

DOUBLELEAF DOOR TYPES

Type	Placement	Opening direction	Handle placement
2LD 01	Into the opening	Out	Left wing
2LD 02	Into the opening	Out	Right wing
2LD 03	Into the opening	Inside	Left wing
2LD 04	Into the opening	Inside	Right wing

PROFILE DESIGN

Frame with thermal break (60 mm)



Frame without thermal break (45mm)



STANDARD DESIGN



- Filling from 40 mm sandwich panels with CFC free PUR foam with closed cells or full glazed sections (FVE)
- Direction of opening in/out
- Max. outside frame width 3000 mm
- Max. outside frame height 3000 mm
- Min. outside frame width 1501 mm
- Min. width of one wing 750 mm
- Max. width of one wing 1500 mm
- Standard finish of aluminium profiles silver natural anodized E6/EV1
- Circumference double sealing
- Securing of opened leaf

OPTIONS AND ACCESSORIES



- One side/double sided painting of profiles and panels in RAL, NCS or DB
- Hinges painting
- PVC foil or 3D print according to current offer
- Windows (possible painting of frames)
- Aluminium glazed sections (glazing according to current offer, ALU frame painting possible)
- Vertically placed panels option
- Securing of opened leaf
- Electric lock

DOOR FITTINGS

Type	Inside/Outside	Inner element
MDKL01	Handle/Handle	Mortise lock, key cylinder + 3 pcs key
MDKL02	Handgrip/Handle	Mortise lock, key cylinder + 3 pcs key
MDKL03	Handle/Handle	Panic lock (function D), key cylinder + 3 key
MDKL06	Handgrip/Handle	Panic lock (function E), key cylinder + 3 key
MDKL13	Handle/Panic exit bar	Panic lock (function D), key cylinder + 3 key
MDKL14	Handgrip/Panic exit bar	Panic lock (function E), key cylinder + 3 key
MDKL15	Handle/Handle	3 point lock, key cylinder + 3 pcs key
MDKL16	Handgrip/Handle	3 point lock, key cylinder + 3 pcs key
MDKL17	Handle/Handle	Panic lock (function B), key cylinder + 3 keys
MDKL18	Handle/Panic exit bar	Panic lock (function B), key cylinder + 3 keys

THRESHOLD TYPES


For profiles with thermal break

- Height 20 mm



For profiles without thermal break

- Height 12 mm



Threshold-free solution

- Height 3 mm
- Allows free passage of cars or forklifts
- Option with or without thermal break

