


## GARAGE DOORS WITH EXTENSION SPRINGS

Dear customers.

We would like to inform you about a new product in our product range - garage door TOORS Guardy EXT (Extension Springs). The prototype was presented at R + T 2015 trade fair in Stuttgart and was highly evaluated by both customers and visitors. This is a conceptual solution, fully comparable with best products on the market.

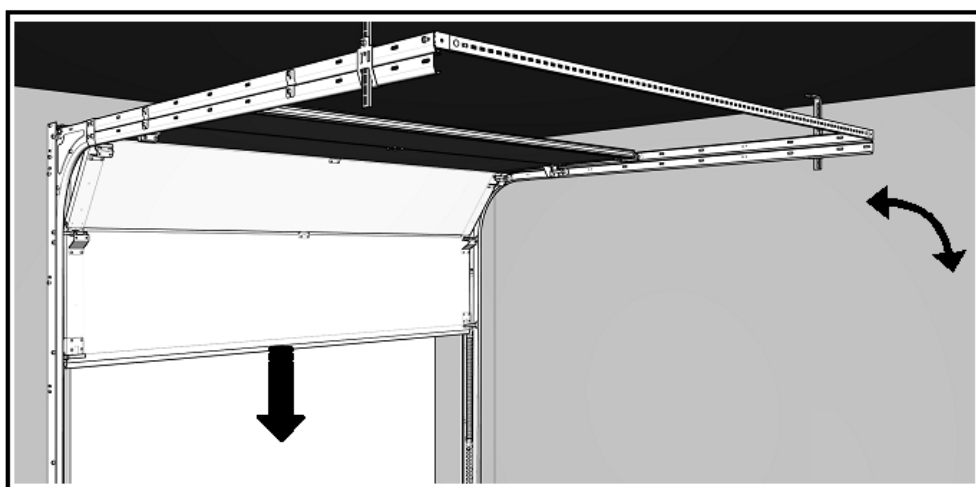

We introduce you a new type of doors that uses for balancing of the door leaf the principle of positioning of the extension springs in the vertical part of the track. Compared to the door with torsion springs there is no special demand for fixing in the lintel. The track is made of galvanized steel profiles connected by screwed joints, which allows precise final adjustment on the building site. Special seals with broken thermal bridge can be used for vertical tracks and lintel profile. Track profiles are pre-assembled in the factory. Installing this type of door is therefore much easier and faster than at the doors with torsion springs.


### SPECIFICATIONS:

- New door balancing system
- Easy and quick installation
- HW and tracks packed in one box

If you have any questions about this Product Info, please contact the TOORS Company.

[www.toors.cz](http://www.toors.cz)

# GARAGE DOORS WITH EXTENSION SPRINGS

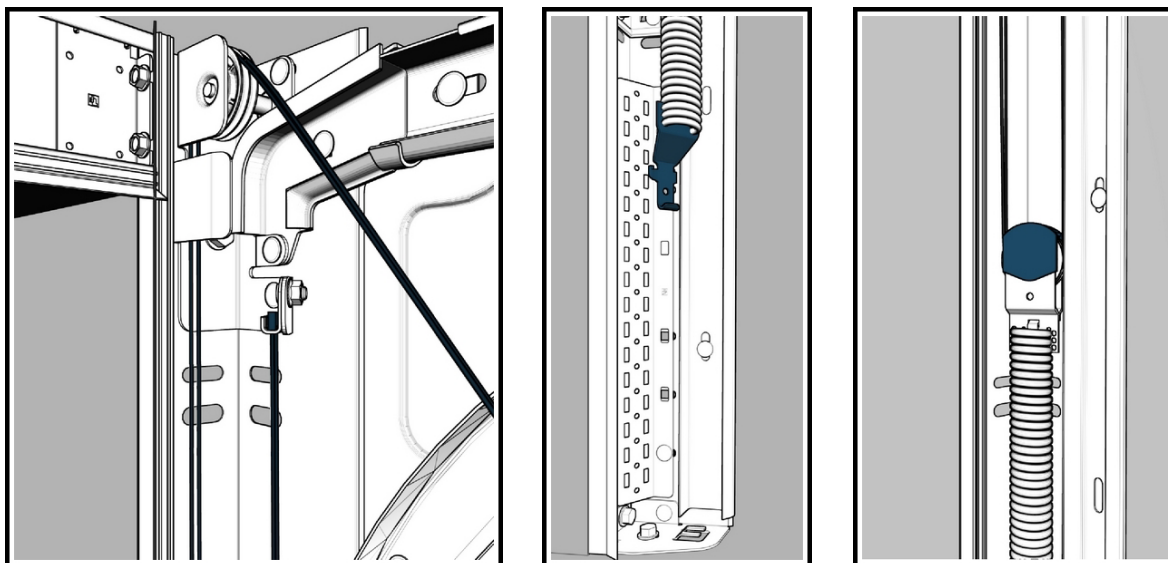

## Specifications:

- Maximum door width 4000 mm (available by mm).
- Maximum weight of door leaf is 120 kg.
- Minimum side room 100 mm on each side is needed (profiles fully hidden behind the opening).
- Installation is possible even into smaller spaces including zero side room (tunnel). However part of the profile is then visible in the opening and passing width of the opening is reduced.
- Minimum lintel height for manually operated doors is 100 mm.
- Minimum lintel height for motor operated doors is 125 mm (for TORMATIC operators supplied by TOORS).
- The height of the sets are pre-defined in following standard sizes:
  - 1875 mm
  - 2000 mm
  - 2125 mm
  - 2250 mm
  - 2375 mm
  - 2500 mm
  - 2625 mm
- If the height of opening is not identical with the height of the set, it is necessary to order the nearest higher height of the set. The difference of the heights is solved by levelling lintel profile. This profile is standard part of delivery and does not require separate ordering.
- Recently HW and tracks are packed into flat cardboard box.
- Doors TOORS GUARDY EXT is cheaper thanks to simple technical solution.
- Trained staff installs the doors into prepared opening within ONE hour.

If you have any questions about this Product Info, please contact the TOORS Company.

[www.toors.cz](http://www.toors.cz)