

INDUSTRIAL DOOR


Order Form

Order No. or name

Quantity

Delivery week

EN

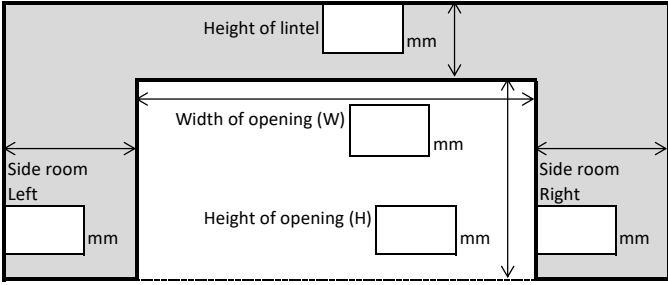

All views are interior views!

- Lift type
- SL350 Standard lift (min. 350 mm)
 - SL420 Standard lift (min. 420 mm)
 - HL High lift
 - HL-T High lift, T-Door
 - VL Vertical lift
 - VL-T Vertical lift, T-Door
 - LL-DT Low lift (min. 200 mm)
 - LL-CE Low lift (min. 230 mm)

- Reinforcing struts Yes Quantity
- Spring break device Yes
- Preassembled shaft Yes, up to 4000x4000
- Bottom bracket Aluminium
- Cable break security device

In case of requirement for door alignment with other door please clearly specify for which door (order/position).

STANDARD

- Lamella stucco
- 533; 9010/9002
 - 531; 9002/9002
 - 532; 9006/9002
 - 536; 9007/9002
 - 534; 7016/9002
 - 535; 5010/9002
 - 538; 8014/9002
 - 540; 7021/9002

PROTECT

- Lamella stucco
- 672; 9010/9010
 - 671; 9002/9010
 - 673; 9006/9010
 - 694; 9007/9010
 - 754; 1021/9010
 - 675; 3000/9010
 - 676; 5010/9010
 - 677; 6009/9010
 - 679; 8014/9010
 - 678; 7016/9010
 - 684; 9005/9010

- V-profile smooth
- 687; 9006/9010
 - 682; 7016/9010
- Flat stucco
- 699; 9010/9010

- Flat smooth
- 667; 9016/9010
 - 668; 7016/9010
 - 680; DB703/9010
- Flat woodgrain
- 669; 9010/9010

- V-profile smooth
- 539; 9006/9002

- Lamella stucco, 80 mm
- 531-80; 9002/9002

- Painting of panels
- RAL
 - NCS

- External painting
- Internal painting
- Painting of bottom and top profile

Shade (code)

Shade (code)

Shade (code)

- Wide end caps/double side hinges
- Yes, (default for W>=5000 mm)

Control

- Manual
- Chain hoist 1:4
- Motor
- Motor supplied by customer

Operation

- Dead man
- Impuls
- Remote control

Accessories for motor

- 400V
- 230V
- Control box IP 54
- Control box IP 65
- Frequency converter
- Helix (spiral) cable
- Wireless transmission (WSD)

Remote controls

- 3-channels Quantity

- External reflex photocell
- External tripple button switch box

Traffic light

- Red light
 - Green light
 - Red + green light
- Quantity

Hanging profiles

- Quantity

Slide bolts, cylinder locks

-
- Left Middle Right

Handles (grips)

-
- Left Right

Air grates

- - Left Right
 - RAL
 - NCS
- Shade (code)

Your notes

Passdoor

- Height of threshold
- Standard threshold (220 mm)
 - Extra Low Threshold (25 mm)

- Position of passdoor
- Left
 - Middle
 - Right

- Passdoor contact
- Left
 - Right

- Type of handle and lock
- KL 01
 - KL 02
 - KL 03
 - KL 04

- KL 05
- KL 06
- KL 13
- KL 14

- Painting of passdoor profiles
- RAL
 - NCS
 - External painting
 - Internal painting

Direction of opening

- hinges on left; DIN right
 - hinges on right; DIN left
-

Shade (code)

Shade (code)

Windows

Section 1 2 3 4 5 6 7 8 9 10 11 Quantity per 1 section

Type of window

Full Visions sections

Section 1 2 3 4 5 6 7 8 9 10 11

Type of glazing

Painting of Full Visions' frame

- RAL
 - NCS
 - External painting
 - Internal painting
- Shade (code)

Insulated sections

Section 1 2 3 4 5 6 7 8 9 10 11

Type of insulated section

Painting of fillings

- RAL
 - NCS
 - External painting
 - Internal painting
- Shade (code)

Expanded mesh sections

Section 1 2 3 4 5 6 7 8 9 10 11

Type of expanded mesh

- RAL
 - NCS
- Shade (code)